


- NOTES :-**
1. EXTEND VALVE STATION PERIMETER EMBANKMENT PROTECTION (SAND/ CEMENT BAGS) ALONG BOTH SIDES OF ACCESS ROAD
  2. ELEVATION AT TOP OF COMPACTED FILL IN VALVE STATION TO BE 300 mm ABOVE ELEVATION OF EXISTING ROAD OR 4000 mm (MIN.) ABOVE EXISTING GROUND LEVEL WHICHEVER IS GREATER.
  3. ACCESS ROAD TO BE CONSTRUCTED AND COMPACTED AS PER VALVE STATION EMBANKMENT.
  4. EXISTING MATERIAL 600 mm UNDER CULVERT PIPES TO BE REMOVED AND HARD CORE FILL TO BE PLACED AND COMPACTED UP T 140 mm ABOVE EXISTING CANAL INVERT LEVEL.

**PLAN OF VALVE STATION**  
SCALE 1:150

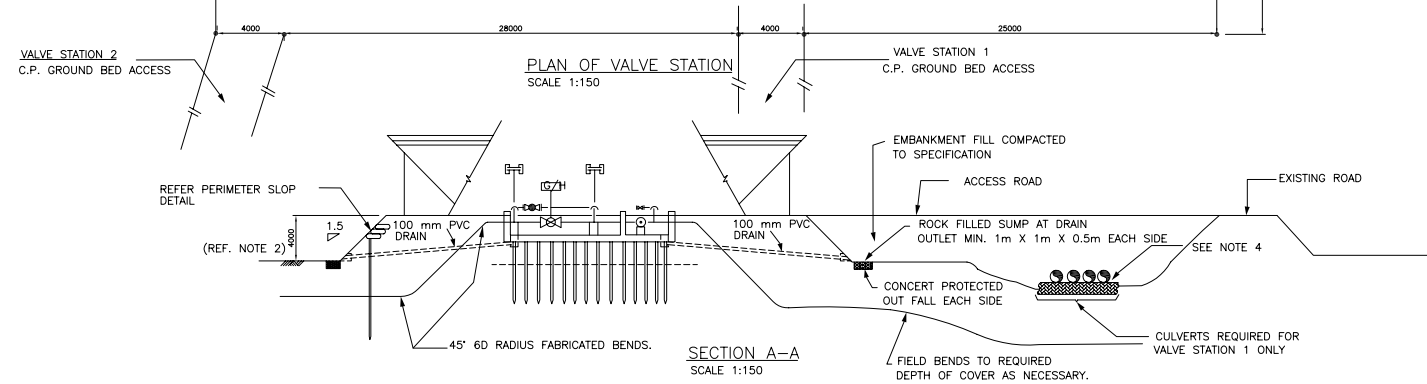

**SECTION A-A**  
SCALE 1:150

<b>A1</b>	Rev	Issue	By	Date	Rev	Amendments	By	Chkd.	Aprvd.	Date	Drawing No.	Related Drawings	Scale:	N.T.S.		
													Drawn:			VALVE STATION LAYOUT
													Date:			
													Checked:			
														Date:		VALVE STATION LAYOUT
													Approved:			
Sheet Size	Rev	Issue	By	Date	Rev	Amendments	By	Chkd.	Aprvd.	Date	Drawing No.	Related Drawings	Date:		Drg. No.	Rev. 0